


Security Hub 2G

DATA SHEET of

Security Hub 2G Security system equipment

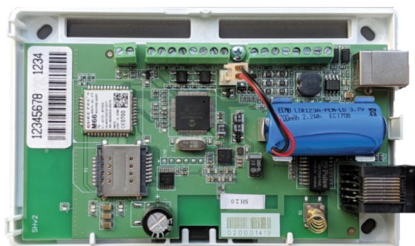

TEKO - Security systems
 420138, Russia, Kazan,
 Prospekt Pobedy 19
 E-mail: export@teko.biz
 Technical support:
support@teko.biz
 Website: www.teko.biz

Product name		Security Hub 2G security system equipment	
Model		Security Hub 2G	
Currents consumption		200 mA	
Power supply		External source	12 VDC
		USB port (type A-B)	5 VDC
Radio module	Operating frequency	433.42 - 434.42 MHz	
	Operating channel width	250 kHz	
GSM module	Type	Quectel M66	
	Frequencies	GSM	850 MHz
		E-GSM	900 MHz
		DCS	1800 MHz
		PCS	1900 MHz
	Sensitivity	GSM	-109 dBm
		E-GSM	-109 dBm
		DCS	-109 dBm
		PCS	-109 dBm
	Sim card format	Mini SIM (2FF)	
Sim card slots	2		
GPRS Multi-slot Class	Class 12		
GPRS Mobile Station	Class B		
LAN/WAN module	Physical interface	Ethernet 10 BASE-T	
	Connector type	RJ45	
Operating temperature range		From -10°C to +50°C	
Maximum humidity		98 %	
Dimension		136 × 86 × 38 mm	
Weight		140 g	

If you have any questions, please contact us at support@teko.biz